

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 May 2005 (19.05.2005)


PCT

(10) International Publication Number
WO 2005/044644 A1

- (51) International Patent Classification⁷: **B60R 21/16**, 21/22
- (21) International Application Number: PCT/EP2004/012425
- (22) International Filing Date: 3 November 2004 (03.11.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0326258.1 11 November 2003 (11.11.2003) GB
- (71) Applicant (for all designated States except US): **AUTOLIV DEVELOPMENT AB** [SE/SE]; Wallentinsvägen 22, S-447 38 Vargarda (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SCHEDLER, Hubert** [DE/DE]; Grünlandstrasse 2a, 85757 Karlsfeld (DE).
- (74) Agent: **MÜLLER, Torsten-Peter**; Autoliv GmbH, Otto-Hahn-Strasse 4, 25337 Elmshorn (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: A SIDE AIR-BAG WITH INTERNAL TETHER

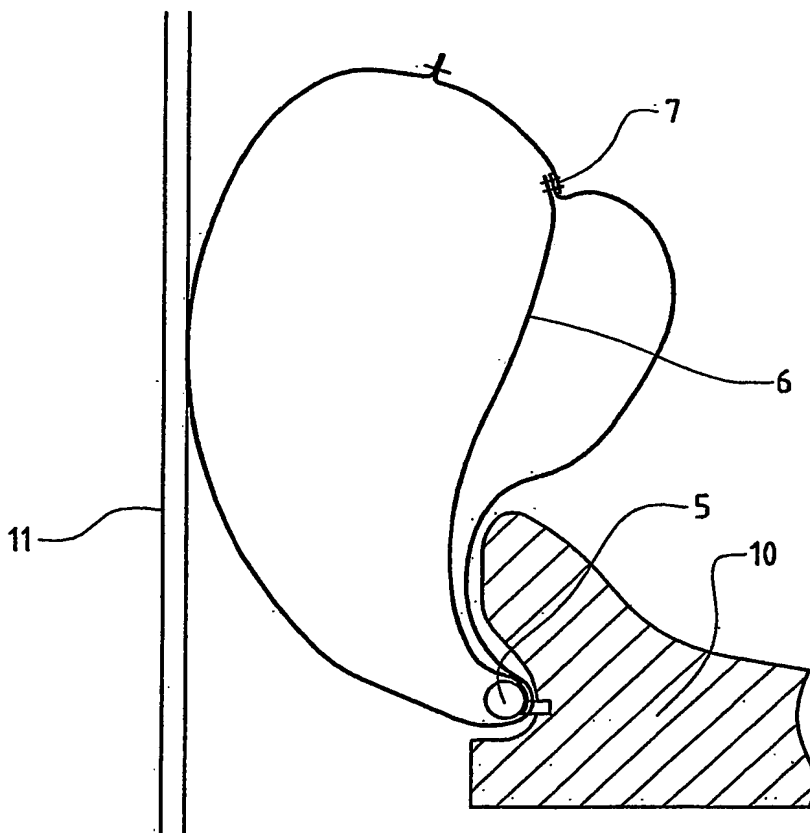

(57) Abstract: A side air-bag (1) formed from two layers of fabric (1), (2), has an internal tether (6) extending from a fold-line (3) in a region of the air-bag which is to receive a gas generator to a point (7) on one of the layers of fabric. The distance around the periphery of the airbag between the ends of the tether (6) is greater in one direction than in the other direction. The length of the tether is less than the shorter distance. The tether (6) serves to assist in guiding the airbag, on inflation, so that it extends forwardly from a vehicle seat to lie adjacent an occupant of the vehicle seat.

WO 2005/044644 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.